

SHARE YOUR LOLL

commercial orders the warranty is three years. Lolli Designs strives to build long-term relationships based on confidence and trust with our customers. We sit beside, on top, and beneath the quality of our fine furniture and will make things right if you are not completely satisfied with your purchase. Lolli Designs hereby guarantees that the piece will be of good quality and workmanship, free from faults and defects. Lolli warrants that all components will not fail, under normal use, for five years from the year mark on the piece or the date of purchase. *For

5 YR WARRANTY

Your new Lolli furniture is a no maintenance product. You'll never need to paint or stain it and it can be left outside all year regardless of the season. It will not rot, even if left standing in water. Nonetheless, we're pretty sure your Lolli furniture will get a lot of use and will at some point need cleaning. We recommend a garden hose and incorporating a soft bristle brush. Adding a tablespoon or two of your favorite eco-friendly soap to the wash will get everything squeaky clean. Mineral deposits left over from hard water can be removed with a solution of vinegar and water. Lolli offers a cleaning kit that has everything you need for great results. Also see our cleaning video at lollidesigns.com/videos.

PRODUCT CARE

Lolli Designs inspires people to appreciate the outdoors.

ASSEMBLY INSTRUCTIONS & PRODUCT INFO:

PLANTER
SQUARE 60 GALLON




We want you to love your Lolli.
Reach out if you need lollygagging assistance.
877-740-3387
sales@lollidesigns.com

LOLLI TOOL

Locate the box marked "Tool Included" before beginning assembly.




CORRECT



Countersunk Hole

INCORRECT

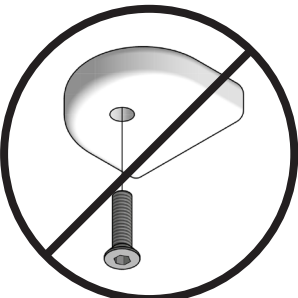

Insert bolts through countersunk hole side of blocks as shown below.

BLOCK & BOLT INSTALLATION

wrap we use is compostable.

**** Please Recycle the BOX and paper packaging. The green plastic stretch**

can also be purchased from Lolli for multi piece assembly jobs.

Sales Associate or Customer Service for support at 877.740.3387. **A Pro Tool Kit** information and visual aids. If you have more questions please contact your Lolli hand. Watch the assembly videos at www.lollidesigns.com/videos for even more you can't muscle the bolt any tighter. It's virtually impossible to over tighten by Key, or the Lolli Tool and tighten firmly until parts are drawn tight together and still allowing removal and reuse of the bolt. Start all bolts by hand, with the Allen standard with a thread coating to reduce bolts loosening after assembly while in inserts as you can easily overtighten and damage the product. All bolts come and know how to use it. Set the clutch setting at medium torque. We do not recommend using an electric drill with a cord and without a clutch to install bolts and know how to use it. Set the clutch setting at medium torque. We do not






"Please read before beginning assembly!"

To avoid damaging furniture perform the assembly of your Lolli furniture on a clean soft surface like a blanket, carpet, or the flattened cardboard box the furniture was shipped in. Components should not be unnecessarily forced together! If it seems parts aren't fitting together you likely have something wrong and you should reread the instructions to ensure you are aligning the proper components. If your piece of furniture requires "Blocks" for assembly one side may have protective film on it. This surface is hidden after assembly so the film can remain on the block or it can be removed. Use a Cordless Screw Gun if you have one and know how to use it. Set the clutch setting at medium torque. We do not

ASSEMBLY TIPS

DAMAGED PRODUCT


Sometimes accidents occur. Please inspect your Lolli furniture when you receive it to make sure that it has not been damaged during shipping. If damage has occurred please take digital pictures of the damaged furniture and the box it was shipped in, and email them to sales@lollidesigns.com or call Customer Service using our toll free number: 877.740.3387, ext. 1. The damage will be assessed and you will be contacted with a solution to the problem. It may be helpful to save all of your packaging material in case a return is necessary.

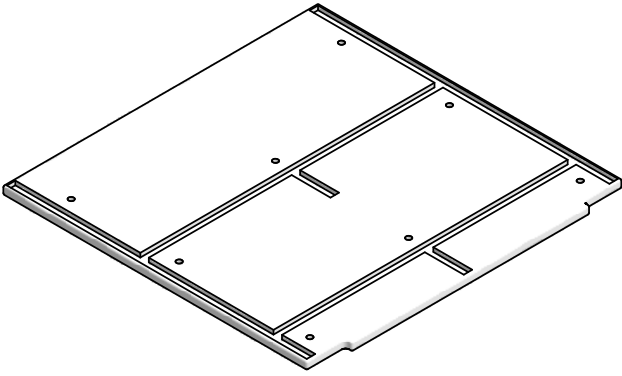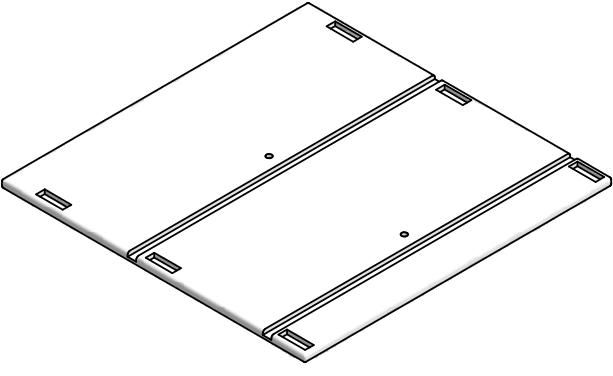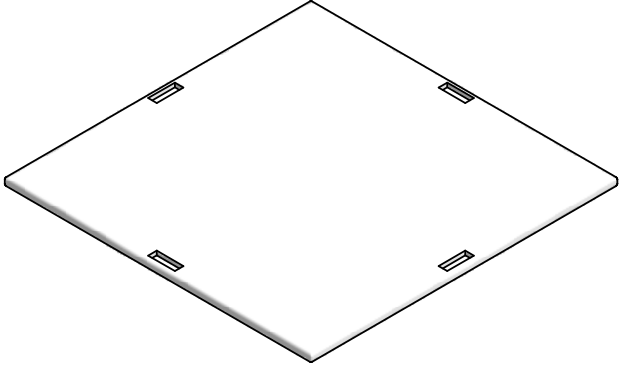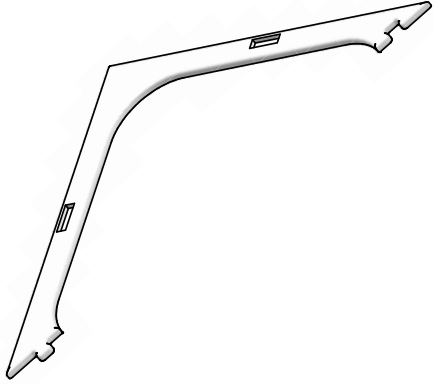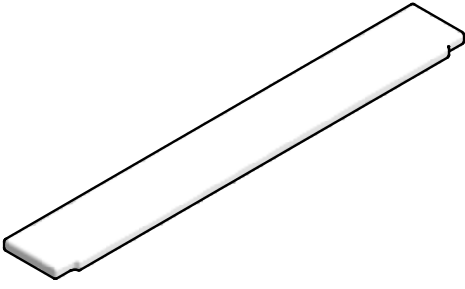INCLUDED PARTS			
FACE		COUNT	2
			
SIDE		COUNT	2
			
FLOOR		COUNT	1
			
RING BRACE		COUNT	2
			
FLOOR BRACE		COUNT	1
			
G BLOCK		COUNT	20
 <p>Insert bolt through countersunk side.</p>			
1" BOLT		COUNT	20
			

ASSEMBLY INSTRUCTIONS


* It is very important that you finger tighten all bolts into inserts to ensure that you do not cross-thread bolts and inserts before tightening. It will also be easier if you wait to tighten bolts until you have all bolts installed and the piece completely assembled. This will allow for more movement of individual pieces and help in aligning holes with inserts. Use the Allen Tool provided to finish tighten bolt until snug.

1 ATTACH SIDES

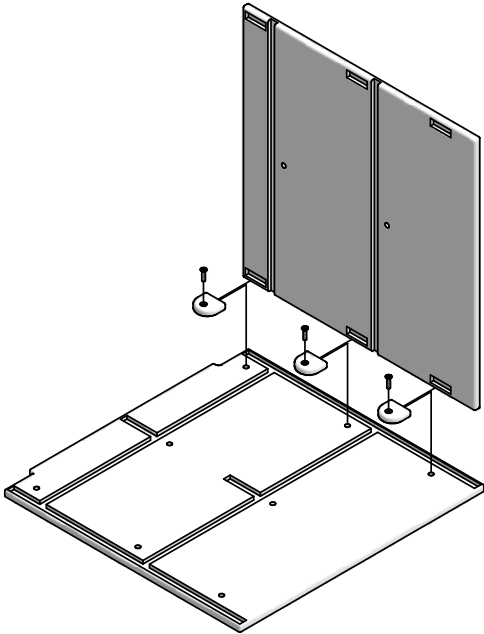


*Please read **Assembly Tips** before beginning assembly.
Lay Face flat on the ground with cutouts side up. Fit Side edge into the Face's cutout. Place G Block's into the Side's cutouts, insert bolts through the blocks into the Face's threaded holes, and finger tighten. Repeat for other side.

2 ASSEMBLE FLOOR & FLOOR BRACE

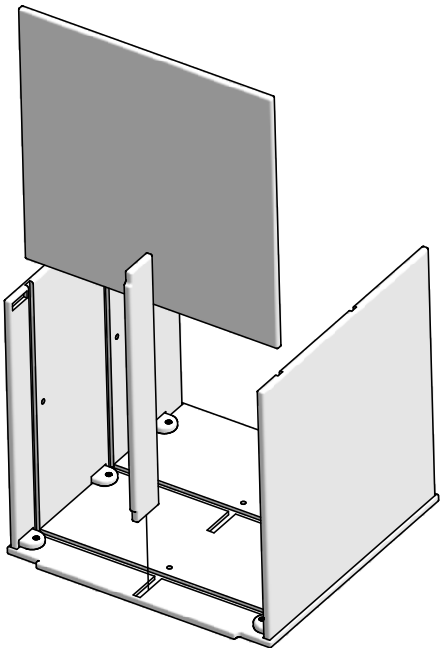


Slide Floor between Side panels by fitting it into the Side's cutouts and sliding into the Face's cutout. The Floor's pocket cutouts should be on the same side as the threaded holes in the Side's and Face. Fit Floor Brace end into the Face's middle cutout.

3 ATTACH FLOOR

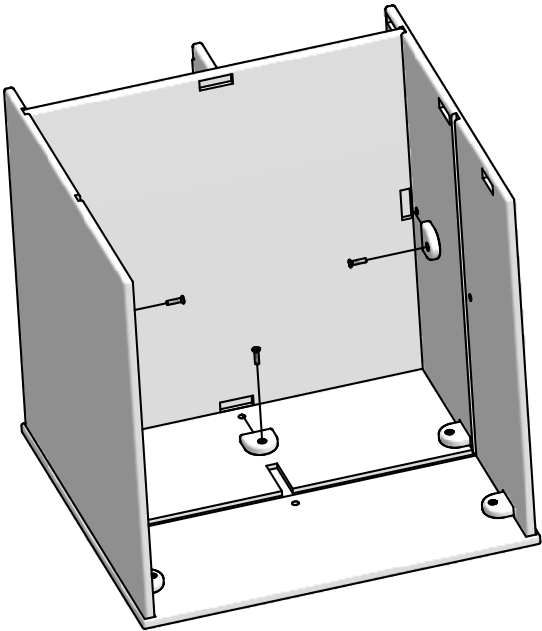


Place G Block's into the Floor's cutouts, insert bolts through the blocks into the Face and Side's threaded holes, and finger tighten.

4 ATTACH RING BRACE

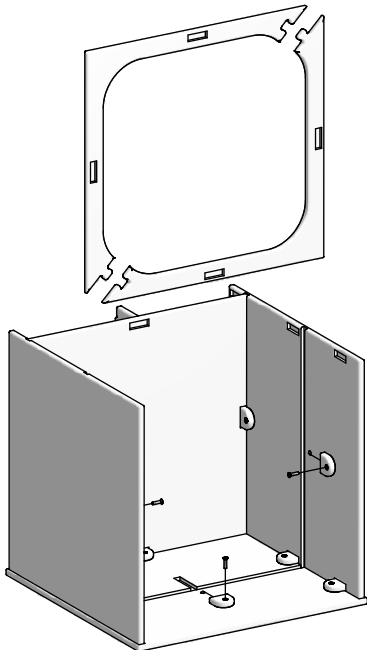

Link Ring Braces together by interlocking the ends together. Fit combined pieces into middle set of cutouts in the Side's and slide down into the Face. The Ring Brace's pocket cutouts should be on the same side as the threaded holes in the Side's and Face.

5 ATTACH SECOND SIDE

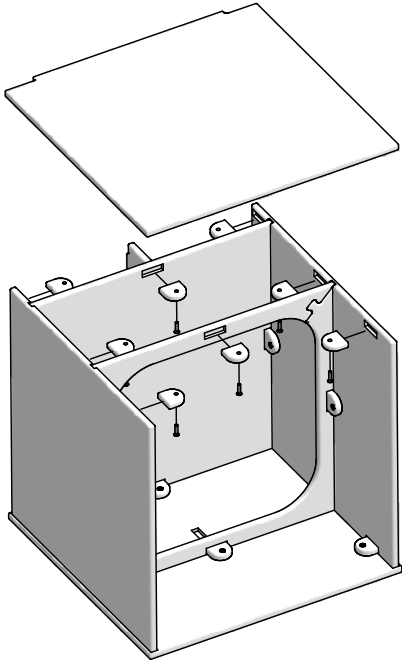

Fit second Face cutouts with assembled container. Place G Blocks into all remaining cutouts, insert bolts through the blocks into the threaded holes, and finger tighten.

Using provided wrench securely tighten all bolts.

X ALTERNATE ASSEMBLY - FLOOR LOCATION

To assemble container with Floor in middle location switch assembly steps 2&3 with step 4. The Floor with Floor Brace will be assembled in the middle set of cut outs and the Ring Brace assembled in the lower set of cut outs.